



ABSOLUTE  
QUALITY  
MADE IN  
FINLAND



# SP1200

Finn-Power SP-series crimping machines with open C-frame structure are optimal for crimping any odd shape, bent or otherwise complex hose assemblies.

SP1200 also available in following configurations:

- Z-model with separate crimping head and hydraulic unit
- S-model with enhanced cycle time
- D-model with double head configuration (on request)

See details from specific product cards.

## TECHNICAL DATA

Crimping range (mm) <sup>1)</sup>	10-54
Crimping range (inch) <sup>1)</sup>	0.39-2.12
Max. crimping force (kN)	1200
Max. crimping force (tonnage)	120
Cycle time 10 mm (s) <sup>2)</sup>	2.1 (S-model: 1.3)
Hose size ID (inch)	1 1/4
Die set series <sup>3)</sup>	CC22
Max. opening (mm) <sup>4)</sup>	+25/+63
Master die D/L (mm)	84/78
Master die D/L (inch)	3.31/3.07
Motor Power (kW/HP)	4.0/5.5
Oil tank volume	50 l


## DIMENSIONS (LxWxH)

Machine (mm)	970x1020x2030
Machine (inch)	38.2x40.2x80.0

## WEIGHT (KG/LBS)

1256/2976

Power supply cable not included.

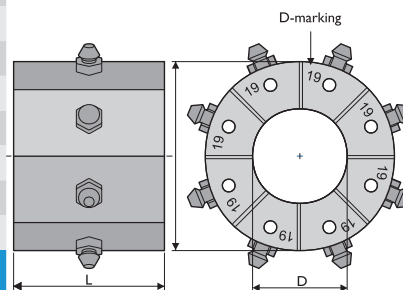

- 1) With standard dies. Crimping range can be increased with special dies.
- 2) Theoretical with 10mm cycle.
- 3) See table for die set data.
- 4) Maximum opening is the total die travel. Add this value to the minimum crimping diameter of the die set used. The result is the maximum opening of the machine with die set in place.

Please note that the images are for illustrative purposes only. The final product may vary in design, features or specifications.

## CONTROL

ICC (7" touchscreen)

## STANDARD FEATURES

Foot pedal (part no 691563)  
QuickChange-tool (part no 691043)  
Pressure crimping ICC1  
Step crimping ICC2

## OPTIONS

Foot pedal (Z-model) (part no 691563)  
Auto greasing G3  
Remote control unit R2 (double hand)  
Quality control ICC3  
Graphical quality control ICC4  
Interface pack ETH (Communication TCP/IP & UDP)  
A3 signal  
Bar Code Reader BCR  
Oil Condition Monitoring OCM

## DIE SET CC22-SERIES

DieSetNo	D (mm)	L (mm)	Crimp. range (mm)
18315/10	10	50	10.0-12.0
18315/12	12	50	12.0-14.0
18315/14	14	50	14.0-16.0
18315/16	16	50	16.0-19.0
18315/19	19	50	19.0-23.0
18315/23	23	50	23.0-27.0
18315/27	27	50	27.0-31.0
18315/31	31	50	31.0-36.0
18315/36	36	50	36.0-41.0
18315/41	41	50	41.0-47.0
18315/47	47	50	47.0-54.0

In addition to the standard die sets, a wide range of special die sets is available on request.